



KH-5125 RD-R (SLAB)

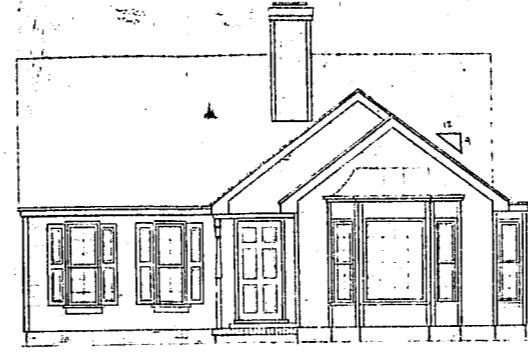


KH-5127 RD-R (SLAB)


- ELEVATION NOTES:**
- ALL UNITS ARE TO RECEIVE 8" BEADED BRIT. SIDING
 - A 1" O" OVERHANG IS TYPICAL AT FRONT AND REAR AND AT ALL REVERSE CORNERS
 - USE A 5/4 x 9 CORNER BOARD ON OUTSIDE OF CORNER (FRONT & REAR ELEV.) AND A 5/4 x 8 CORNER BOARD ON INSIDE OF CORNER (END ELEVATION)
 - ALL OPEN WINDOWS TO RECEIVE COPPER ROOF CAP SEE DETAIL 9HT 2 2
 - ALL SHUTTERS TO BE 1" x 6" RAISED PANEL WOOD SHUTTERS
 - SEE HMT # 2 FOR LINES AND WINDOW SIZE AND LOCATION
 - USE 2" x 5 TURNED ROOF CORNERS OF ROOF

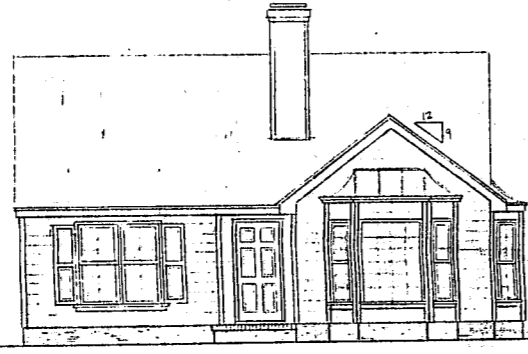


KH-5126 RD-R (SLAB)

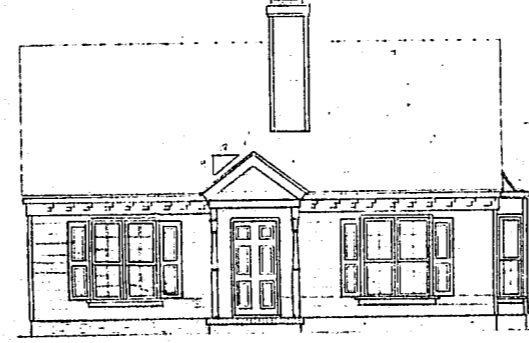

KH-5128 RD-R (SLAB)

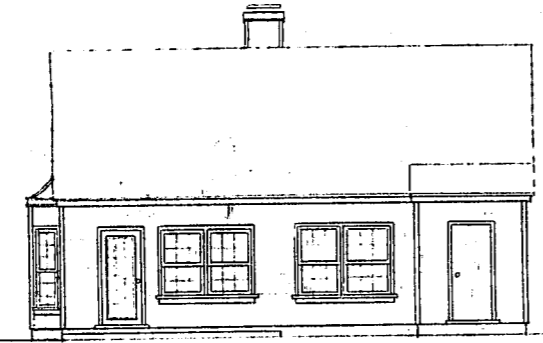

TYPICAL KH-5120 RD-R REAR ELEVATION

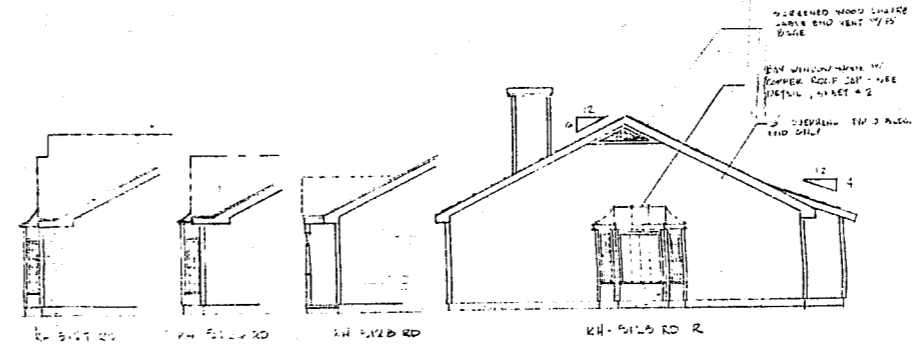

TYPICAL BUILDING END ELEVATION! KH-5120 RD-R

DATE		REVISION #	DATE	DRAWN	DATE	SHEET NO.
KH-5120 RD-R						
ENTRY ELEVATIONS						