



KH-5125 RD-R (SLAB)

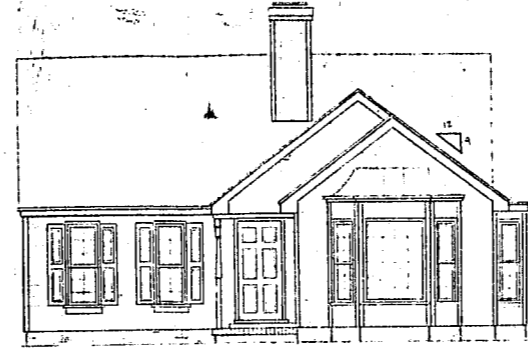


KH-5127 RD-R (SLAB)


- ELEVATION NOTES:**
- ALL UNITS ARE TO RECEIVE 8" BEADED BRIT. SIDING.
 - A 1" O" OVERHANG IS TYPICAL AT FRONT AND REAR AND AT ALL REVERSE CORNERS.
 - USE A 5/4" x 9" CORNER BOARD ON OUTSIDE OF CORNER (FRONT & REAR ELEV.) AND A 5/4" x 4" CORNER BOARD ON INSIDE OF CORNER (END ELEVATION).
 - ALL OPEN WINDOWS TO RECEIVE COPPER ROOF CAP. SEE DETAIL 9HT-2.
 - ALL SHUTTERS TO BE 1" x 6" RAISED PANEL WOOD SHUTTERS.
 - SEE HMT #2 FOR LINES AND WINDOW SIZE AND LOCATION.
 - USE 2" x 5" TURNED ROOSTER CORNERS AT CORNER.

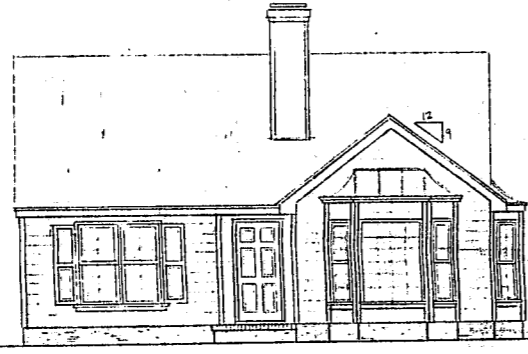


KH-5126 RD-R (SLAB)

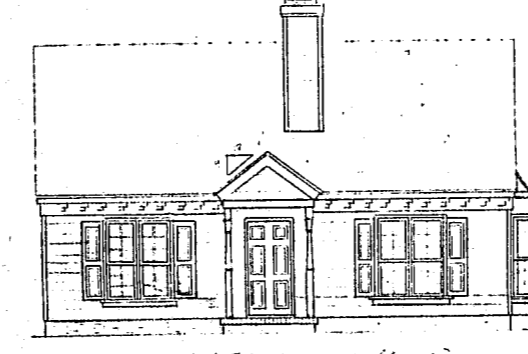

KH-5128 RD-R (SLAB)

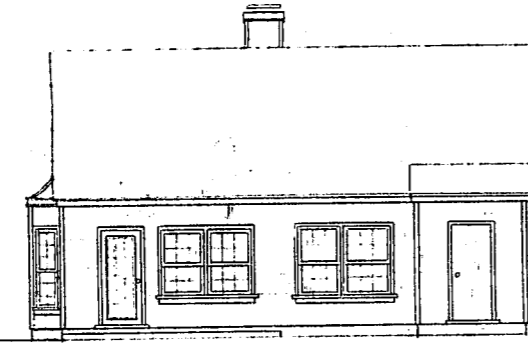

TYPICAL KH-5120 RD-R REAR ELEVATION

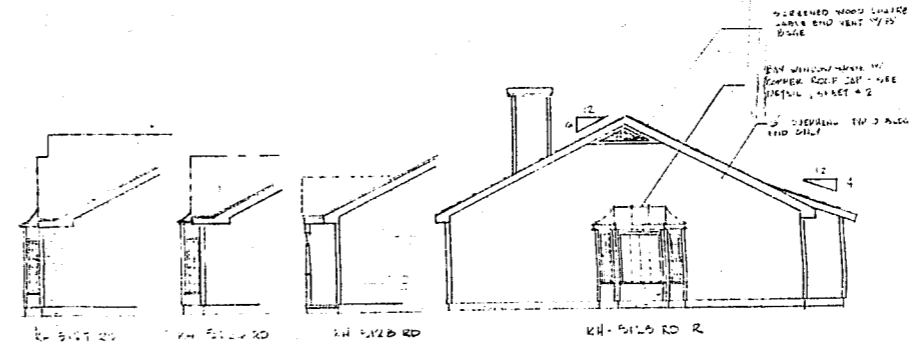

TYPICAL BUILDING END ELEVATION

KEY homes				SHEET NO.
DATE	REVISION #	DATE	KH-5120 RD-R ENTRY ELEVATIONS	5
		4-28-00		
		DRAWN DVA		