


PAVEMENT MARKING LEGEND

SYMBOL	DESCRIPTION
A	4" SOLID WHITE LINE
B	4"x2' WHITE MINI-SKIP LINE
C	4"x10' WHITE SKIP LINE
D	8" SOLID WHITE DIAGONAL LINE
E	4" SOLID YELLOW LINE
F	4" SOLID DOUBLE YELLOW LINE
G	4"x10' YELLOW SKIP LINE
H	8" SOLID YELLOW DIAGONAL LINE
I	24" SOLID WHITE LINE
J	WHITE ARROW SYMBOL

STRIPING PLAN

NOTES:

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PLACEMENT OF ALL PROPOSED PAVEMENT MARKINGS IN ACCORDANCE WITH THIS PLAN.
2. THE CONTRACTOR SHALL COMPLETELY REMOVE ANY EXISTING PAVEMENT MARKING THAT IS IN CONFLICT WITH THE PROPOSED PAVEMENT MARKINGS.
3. ALL WORK AND MATERIALS SHALL BE DONE IN CONFORMANCE WITH NCDOT STANDARDS AND SPECIFICATIONS.
4. CB 7, 8 AND 9 WILL BE BLOCK AND GRAVEL DROP INLET (T.O.C. 4.13), ALL OTHERS WILL BE STANDARD PROTECTION (T.O.C. 4.14).
5. ALL STRIPING TO BE THERMOPLASTIC.

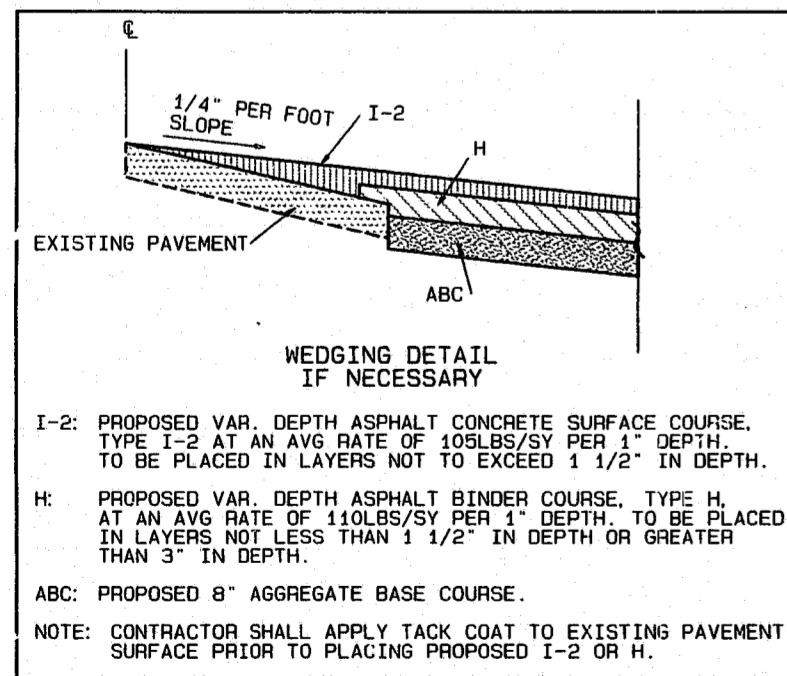


WEDGING DETAIL IF NECESSARY

I-2: PROPOSED VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE. TYPE I-2 AT AN AVG RATE OF 105LBS/SY PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1 1/2" IN DEPTH.

H: PROPOSED VAR. DEPTH ASPHALT BINDER COURSE, TYPE H, AT AN AVG RATE OF 110LBS/SY PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" IN DEPTH OR GREATER THAN 3" IN DEPTH.

ABC: PROPOSED 8" AGGREGATE BASE COURSE.

NOTE: CONTRACTOR SHALL APPLY TACK COAT TO EXISTING PAVEMENT SURFACE PRIOR TO PLACING PROPOSED I-2 OR H.



98-SP-182
APPROVED
 TM 11-4-98