

NOTES: CONCRETE CURBS & GUTTERS
 1. CONCRETE SHALL BE 3000 PSI
 2. CONTRACTION JOINTS AT 10' INTERVALS
 3. FINISH ALL CONCRETE WITH CURING COMPOUND




PARKING SITE DATA
 CARY CHRISTIAN CHURCH 1503 WALNUT STREET, CARY, NC 27513
 LANDSCAPE DATA ON LANDSCAPE PLAN S-3

TRACT SIZE: 1.99 ACRES ZONING MAP 574 #217 ZONING R-6
 IMPERVIOUS AREA VUA = 19,232 SF *ACTUAL GRADING WILL DISTURB LESS THAN 15,000 SF
 NO EROSION PLAN IS REQUIRED BY THE TOWN OF CARY


PARKING REQ'D = 1:8 SEATS = 25 SPACES
 PARKING PROVIDED = 27 SPACES
 HANDICAP SPACES = 1 SPACE = 1 REQUIRED

LEGEND:
 ○ EXISTING TREES
 --- 495 EXISTING CONTOURS
 --- 493 PROPOSED CONTOURS BENCH MARK ON CORNER OF KIMBOLTON & NOTTINGHAM DR. ELEV. 494.24 SEE S-1
 --- TREE PROTECTION FENCE
 --- SITE FENCE
 --- WHEEL STOP 6" x 6" x 8" TREATED
 --- SHADDED AREA DENOTES 8" ABC SUB BASE - ALL OTHER AREAS 6" ABC SUB BASE


CONTRACTOR TO OBTAIN ALL GRADING PERMITS
 CONTRACTOR MUST LOCATE ALL UNDERGROUND UTILITIES BEFORE EXCAVATION BEGINS
 LANDSCAPE ARCHITECT WILL NOT BE RESPONSIBLE FOR DAMAGES DUE TO THE IMPLEMENTATION OF THIS PLAN.
 ALL CONSTRUCTION IS TO BE PERFORMED IN ACCORDANCE WITH THE CURRENT TOWN OF CARY STANDARDS
 SEE NOT IN 100 YEAR FLOOD PLAIN

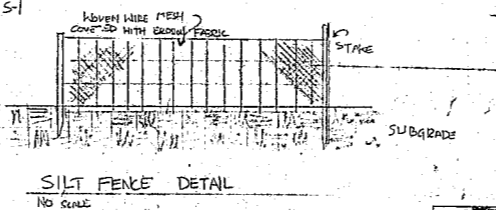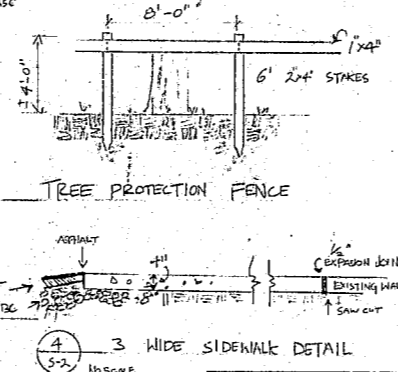

METES & BOUNDS FROM SURVEY BY:
 A. EARL SMITH 12-12-1968
 IRON PIPES REMOVED BY D.O.T



REVISION	BY
RELINE FROM SURV	EF
ADD SIDEWALK	S-3
SHOW 10' STREET BUFFER	
ADD 8" ABC	
SHOW BLDG. DEMOS	
INCREASE SLOPE	
S-1 TO S-2	
REVISIONS: 6-6-91	CAF



HORTICULTURAL RESOURCES
 CHARLES F. FRIEDRICK, LANDSCAPE ARCHITECT
 210 UNK. AVE. CARY, N.C. 27513
 919.960.1879

CARY CHRISTIAN CHURCH
 1503 WALNUT STREET, CARY, NC
 PARKING LOT IMPROVEMENTS
 PAVING LAYOUT, GRADING, EROSION CONTROL

FOR CONSTRUCTION

DRAWN	
CAR FRIEDRICK	ASEA
CHECKED:	
DATE	23 APR 1991
SCALE	1" = 20' - 0"
JOB NO.	0019
SHEET	5-2 3

FOR CONSTRUCTION