



SERVICES PROTECTION ENCLOSURE-A3													
PANEL NAME		MDP		LOCATION		200A MLO		CABINET MTG		SURFACE MTG		ENCLOSURE NEMA TYPE	1
VOLTS: 120/240, PHASE: 1 Ø, WIRE: 3 W., 60 HZ., MIN. INTERRUPTING RATING: 10,000 AMPERES													
LOAD SERVED	BRANCH CIRCUIT CONDUIT & WIRING	BREAKER POLE	AMP	KVA	CKT	Ø	CKT	KVA	BREAKER AMP	POLE	BRANCH CIRCUIT CONDUIT & WIRING	LOAD SERVED	
BTS CABINET	3#8,#10G-3/4"C	2	50	4.2	1	A	2*	0.2	20	1	2#12,#12G-3/4"C	RECPT-SERVICE PROTECTION ENCL-A3	
				4.2	3	B	4*	0.2	20	1	2#12,#12G-3/4"C	RECPT-BTS CABINET	
BTS CABINET	3#8,#10G-3/4"C	2	50	4.2	5	A	6	1.2	15	1	2#12,#12G-3/4"C	VOLTAGE SENSOR	
				4.2	7	B	8	1.2	15	1	2#12,#12G-3/4"C	VOLTAGE SENSOR	
SPARE		1	20		9	A	10		20	1		SPARE	
SPACE					11	B	12	0.1	15	1	2#14,#14G-3/4"C	SPE-A3 LIGHTS	
					13	A	14						
					15	B	16						
					17	A	18						
					19	B	20						
					21	A	22						
					23	B	24						
CONNECTED KVA PHASE A:			9.80			CONNECTED KVA PHASE B:			9.90			TOTAL KVA:	19.70
REMARKS: 1. * PROVIDE GFI BREAKER 2. MDP PROVIDED WITHIN SERVICE PROTECTION ENCLOSURE TOTAL NUMBER POLES: 12													

### PANELBOARD SCHEDULE

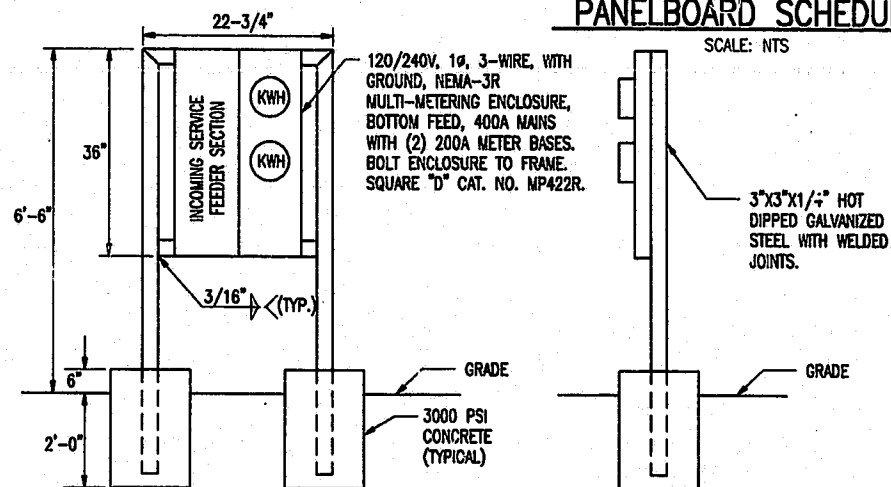

### DUAL METERING ENCLOSURE/MOUNTING DETAIL



NO.	DATE	REVISION DESCRIPTION	BY	CHK
-----	------	----------------------	----	-----

**BELLSOUTH**  
Carolinass PCS, L.P.

09-368-142-H

PANELBOARD  
SCHEDULE

copyright © 19 97

**Richard Ober-Hershey**

222597-02/22597-02/15/97  
2321 Research Drive  
Post Office Box 3138A, Raleigh, NC 27622-1586  
Tel: 919/782-5511 Fax: 919/782-5805



SEAL NOT VALID UNLESS SIGNED AND DATED

PROJECT MANAGER J. LATHAN DEPARTMENT MANAGER A. ANCHORS

LEAD DESIGN PROF. R. WERT CHECKED A. ANCHORS

DRAWN G. SUMERLIN DATE 1/15/97

PROJECT NUMBER 22597-02 DRAWING NUMBER E-6

**CONSTRUCTION DOCUMENTS**  
RALEIGH OFFICE

97-SP-034  
**APPROVED**  
TM 4-3-97