

William G. Daniel & Associates
 CONSULTING ENGINEERS
 1152 Executive Circle, Suite 201
 Cary, North Carolina 27511

SEAL

PROJECT SUBDIVISION
CHASE & ALEXANDER PROP.
 PROP. OF L.C. ALEXANDER & MARGON CHASE
 CARY, NORTH CAROLINA

DATE
 4-27-82

SCALE
 AS NOTED





SHEET
 2
 OF
 3

DRAWN BY
 D. PRIEST

REVISIONS

#1 TOC REVIEW

- Seeding Specifications**
1. Rough till entire disturbed soil surface to a depth of six inches. Grade surface to a smooth uniform slope.
 2. Apply agricultural lime and fertilizer to entire disturbed area. 180 lbs. agricultural lime/1000 sq. ft. (4.0 tons/acre), and 35 lbs. 10-10-10 fertilizer/1000 sq. ft. (1500 lbs./acre), or 45 lbs. 8-8-8 fertilizer/1000 sq. ft. (2000 lbs./acre) and 40 lbs. 50% superphosphate/1000 sq. ft. (1750 lbs./acre) or 55 lbs. 33% superphosphate/1000 sq. ft. (2400 lbs./acre)
 3. Thoroughly till the entire soil surface again to six inches completely incorporating the lime and fertilizer.
 4. **Permanent Grass**
 Evenly apply grass seed:
 2.75 lbs. tall fescue/1000 sq. ft. (120 lbs./acre) during March through May and September through November, or 2.75 lbs. tall fescue/1000 sq. ft. and 2.00 lbs. annual rye grass during June through August and December through February, or
Temporary and Permanent Grass Seeding (seeding at two dates)
 Temporary grass (without lime and fert.) - 2.00 lbs. annual rye grass, and later
 apply lime, fertilizer and till as specified above and apply 2.75 lbs. tall fescue/1000 sq. ft. (120 lbs./acre) only during March through May and September through November.
 5. After seeding whether temporary or permanent apply 75 lbs. wheat straw/1000 sq. ft. completely covering the soil surface and asphalt tack.
 6. Grass mulch and asphalt tacking shall be used on slopes of 3:1 or less, unless specifically authorized by the soil scientist/landscape architect and soil erosion control officer.

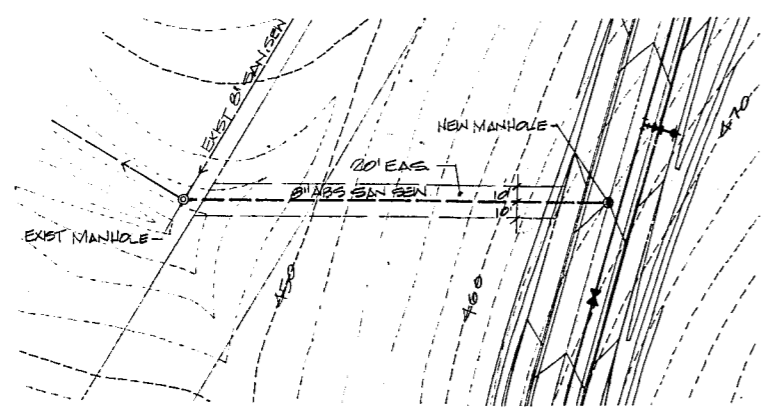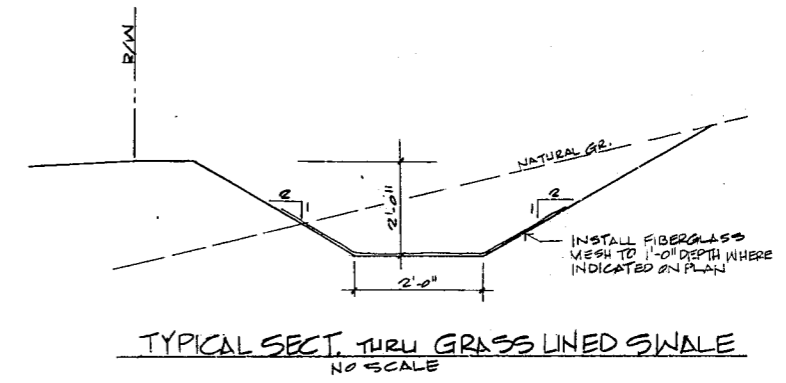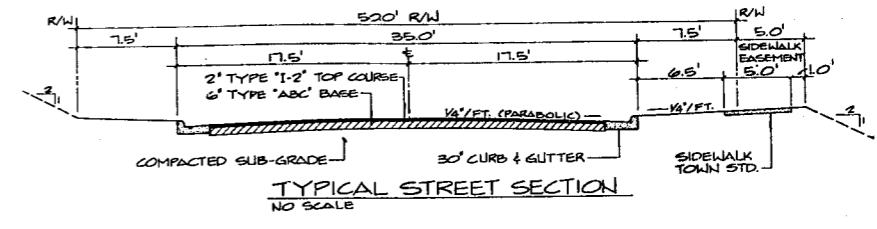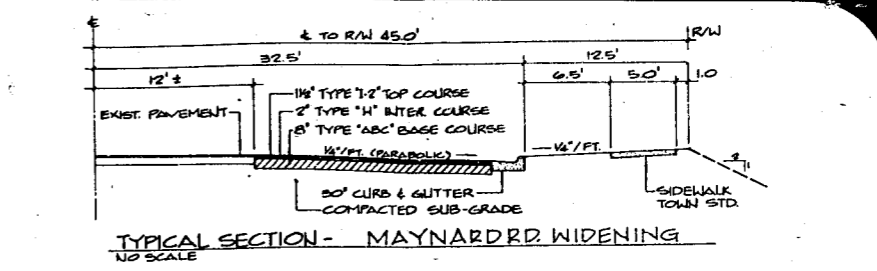

PLAN
 SANITARY SEWER OUTFALL
 1" = 50'

- CONSTRUCTION SEQUENCE**
1. OBTAIN GRADING PERMIT
 2. INSTALL ALL EROSION CONTROL MEASURES & DEVICES
 3. PERFORM ALL ROUGH GRADING
 4. STABILIZE ALL GRADED AREAS W/STONE OR GRASS
 5. COMPLETE BALANCE OF SITE WORK

