ENTRY LIGHTS BY PROGRESS LIGHTING

60w WALL MOUNT

SPECIFICATIONS

LAMP TYPE: TWO CANDELABRA BASE LAMPS, 60w MAX.
FINISH: BLACK
STYLE: Cast aluminum wall torch with beveled clear glass panes. Polished solid brass candles and reflector.
HEIGHT: 8 1/2" W x 23" H without tail, 37" with tail

CATALOG NUMBER: P5622-31 BLACK



SIGN LIGHTING

20w WALL MOUNT

SPECIFICATIONS

LAMP TYPE: BAB (20w) 40° FLOOD
FINISH: BLACK
LENS: RECTILINEAR
PROJECTION FROM WALL: 24"
OPTION: PC75 - POWER CANOPY WITH 75w TRANSFORMER

CATALOG NUMBER: BK-SN-J-BLP-13-24-C-PC75

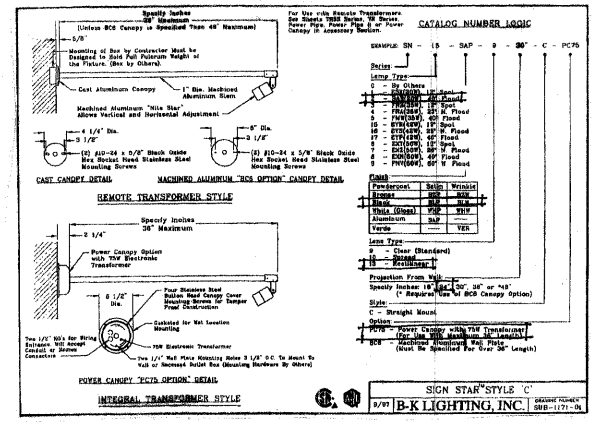

RECTILINEAR HORIZONTAL LUMINAIRE

400w HIGH PRESSURE SODIUM

SPECIFICATIONS

Housing and lens are one-piece, die cast aluminum with soft radius corners. The lens is clear flat tempered glass. A continuous EPDM gasket seals the door assembly to the housing. Hinged aluminum door secured to housing with captive stainless socket head screws.

Hinged reflector assembly allows access to mounting hardware and ballast. Three reflectors - specular anodized optical assemblies - provide an asymmetrical, forward throw, or square symmetrical light distribution pattern.

Ballast components are mounted directly and heat sinked to the cast housing for cooler operation and longer life. Ballasts are High Power Factor Constant Wattage Autotransformer or Hi-Reactance.

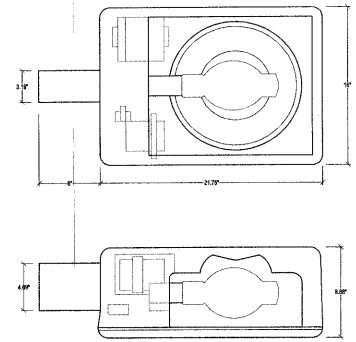

400W HIGH PRESSURE SODIUM LUMINAIRE

PLAN SYMBOL

30"

30" CONC BASE (TYPICAL)

ELEVATION

LIGHTING LEGEND

DECORATIVE WALKWAY LIGHTING BY STERNBERG

100w METAL HALIDE

CLASSIC 35½" HT.

8930 An impressive period roof design tops our unusual eight sided cage. The Verde Green finish sets off the detailing on the roof and the stately finial. This luminaire scales 15" wide (18" on the diagonal) by 36" high. Shown with clear seeded acrylic lens and glass refractor (Type V or III available). The design is also offered in three smaller sizes with various mountings.

CLASSIC is protected by copyright.

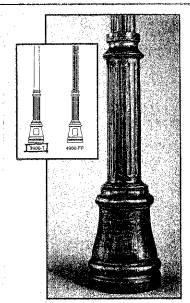

RICHMOND (3900-T AND 4900-FP)

Indirect Cone Optic System provides the warmth of candle and gaslight via the ultimate method of indirect lighting. Crafted of highly reflective specular Alzak, the louver optical system places the lamp in the roof where either a Type V or Type III reflector directs the light off the bottom one with a cutoff distribution. The ambiance created at night by these systems is both excellent and elegant. However, it should be noted that the renovation period may find the silver optic cone less than authentic in the daylight.

DECORATIVE STREET LIGHTING BY MAINSTREET

100w HIGH PRESSURE SODIUM

L200/L300 SERIES

L300 SINGLE LUMINAIRE ON 13' ROUND POLE: 13' AAP813
L200 DOUBLE LUMINAIRES ON 13' ROUND POLE WITH DECORATIVE ARM: 13' AAP813PB22

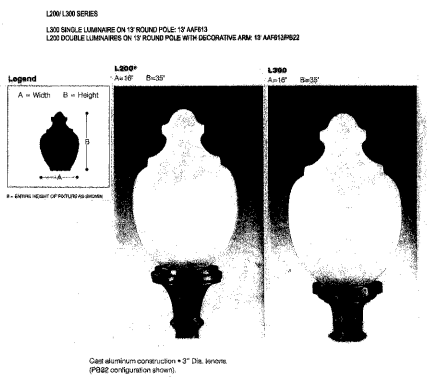

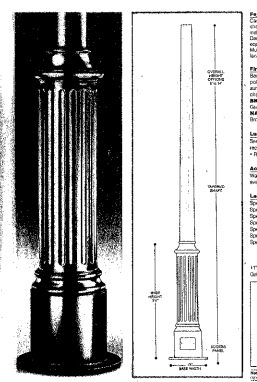

Features:
Cast Aluminum base, tapered satin aluminum shaft • Strong • Lightweight for ease of installation • Requires little maintenance • Corrosion resistant • Luminaire and mounting equipment comes in direct contact with base • Multiple luminaire arrangements • 3" Diameter tenon mount standard

Finish Options
Sandblast finished with a superior quality polyurethane paint applied over etched surface. Base and shaft are satin and luminaire is gloss unless otherwise specified. **BK**=Black, **BP**=Matte Black, **RG**=Rustic Green, **OG**=Olive Green, **FG**=Forest Green, **MAG**=Aztec Aubergy Green, **CB**=Chocolate Brown, **MK**=Other, consult factory.

Luminaire Options
See Luminaire Selection Guide for recommended styles and sizes
• Refer to Luminaire Section for details

Accessory Options
Wall brackets • Ladder rests • Multiple arms available

Lamp Post Catalog Numbers
Specify: AA838 = 8' Height Option
Specify: AA839 = 9' Height Option
Specify: AA810 = 10' Height Option
Specify: AA811 = 11' Height Option
Specify: AA812 = 12' Height Option
Specify: AA813 = 13' Height Option
Specify: AA814 = 14' Height Option

11" Diameter, 3-Hole Anchor Bolt Circle Standard
Galvanized Anchor Bolts and Template Supplie



Cast aluminum construction • 3" Dia. tenons. (PB22 configuration shown).



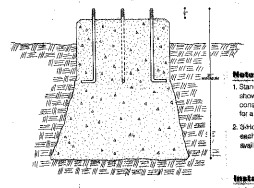

Notes
1. Standard anchor bolt circle diameters are shown on each specification page. For actual construction use, you must contact the factory for a proper template.
2. 3-Hole anchor bolt circles are standard for each style of lamp post. 4-Hole anchoring is available, consult factory.

Installation Procedures
1. ¾" O.D. 18" long anchor bolts are supplied.
2. Pour a minimum of 36" concrete footer, making sure to adjust depth to your local finish level.
3. Rotate anchor bolt template to orient access panel as desired.
4. Set into concrete base with 2" of anchor bolt exposed above concrete surface, fastening nuts only 1 nut.

DECORATIVE UPLIGHTING DETAIL

NOT TO SCALE



TYPICAL GROUPING



SPECIMEN TREE

01-SD-012
APPROVED
TOWN OF CARY
Approved By DRC Date 5-22-02
Planning GVD Date 6-19-02
Engineering TS Date 6-12-02

ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH CURRENT TOWN OF CARY STANDARD SPECIFICATIONS AND DETAILS

No.	Revision	Date	By
1.	REVISED LIGHTING PLAN	4/15/02	CBP

Designer	CBP
Drawn By	CBP
Checked By	CBP
Scale	1"=40'
Date	01MARCH02
Job No.	2012.38.00

THE GROVE AT CARY PARK

LIGHTING DETAILS

WITHERS & RAVENEL
ENGINEERS I PLANNERS I SURVEYORS
111 MacKenan Drive Cary, North Carolina 27511 tel: 919-469-3340 fax: 919-467-6008 www.withersravenel.com

Sheet No. C-6

K:\01\01-230\01238\SHEET-CG.dwg, 04/18/2002 05:25:43 PM, XES 8850 OLD.pc3, Withers & Ravenel, Engineering & Surveying, Inc.