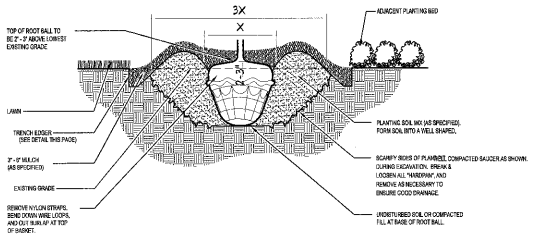

GENERAL NOTES:
1. SEE SPECIFICATION REQUIREMENTS PRIOR TO PLANTING.
2. ENSURE ALL AIR POCKETS ARE REMOVED WHILE BACKFILLING SOIL MIXTURE.
4. SOAK PLANT PIT IMMEDIATELY AFTER PLANTING.
5. DO NOT BREAK ROOT BALL. DO NOT CARRY OR ADJUST ROOT BALL BY USING TREE TRUNK.

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. SET TREE SUCH THAT TOP OF ROOT BALL IS 2"-3" HIGHER THAN FINISHED GRADE. IF NECESSARY, ADD EXCAVATED SOIL DIRECTLY UNDER ROOT BALL AND COMPACT THOROUGHLY TO ADJUST ROOT BALL HEIGHT.
3. POSITION TREE SUCH THAT THE BEST PROFILE OF THE TREE- THE SIDE WITH THE MOST ATTRACTIVE BRANCHING PATTERN, IS FACING THE DIRECTION IN WHICH IT WILL BE SEEN THE MOST.
4. BACKFILL & WATER IN SPECIFIED SOIL MIXTURE.
5. CONSTRUCT TRENCH EDGE AND ADD SPECIFIED MULCH. STAKE & ARBOR TIE PLANT SECURELY.

1. Tree Planting
Scale N.T.S.

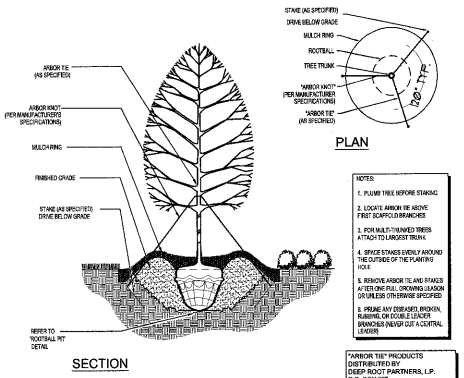

NOTES:
1. PLANT TREE BEFORE STAKING
2. LOCATE ARBOR TIE ABOVE FIRST SCAFFOLD BRANCHES
3. FOR MULTI-TRUNKED TREES ATTACH TO LARGEST TRUNK.
4. SPACE STAKES EVENLY AROUND THE OUTSIDE OF THE PLANTING HOLE
5. REMOVE ARBOR TIE AND STAKES AFTER ONE FULL GROWING SEASON OR UNLESS OTHERWISE SPECIFIED
6. PRUNE ANY DISEASED, BROKEN, RUBBING, OR DOUBLE LEADER BRANCHES (NEVER CUT A CENTRAL LEADER)

"ARBOR TIE" PRODUCTS DISTRIBUTED BY
DEEP ROOT PARTNERS, L.P.
P.O. BOX 927
DECATUR, GEORGIA 30031-0927
CONTACT: BRENDA GUGLIELMINA
404.378.9390

2. Tree Guying
Scale N.T.S.

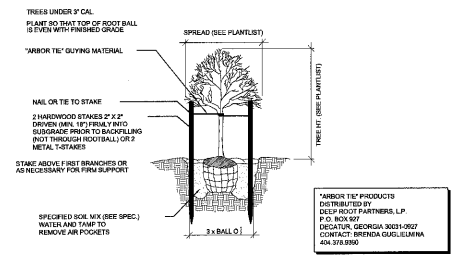

"ARBOR TIE" PRODUCTS DISTRIBUTED BY
DEEP ROOT PARTNERS, L.P.
P.O. BOX 927
DECATUR, GEORGIA 30031-0927
CONTACT: BRENDA GUGLIELMINA
404.378.9390

3. Tree Staking
Scale N.T.S.

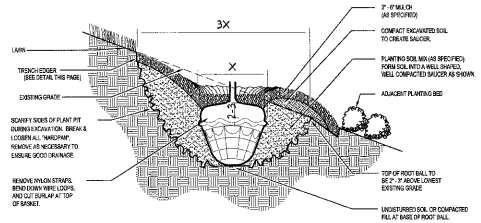

GENERAL NOTES:
1. SEE SPECIFICATION REQUIREMENTS PRIOR TO PLANTING.
2. ENSURE ALL AIR POCKETS ARE REMOVED WHILE BACKFILLING SOIL MIXTURE.
4. SOAK PLANT PIT IMMEDIATELY AFTER PLANTING.
5. DO NOT BREAK ROOT BALL. DO NOT CARRY OR ADJUST ROOT BALL BY USING TREE TRUNK.

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. SET TREE SUCH THAT TOP OF ROOT BALL IS 2"-3" HIGHER THAN FINISHED GRADE. IF NECESSARY, ADD EXCAVATED SOIL DIRECTLY UNDER ROOT BALL AND COMPACT THOROUGHLY TO ADJUST ROOT BALL HEIGHT.
3. POSITION TREE SUCH THAT THE BEST PROFILE OF THE TREE- THE SIDE WITH THE MOST ATTRACTIVE BRANCHING PATTERN, IS FACING THE DIRECTION IN WHICH IT WILL BE SEEN THE MOST.
4. BACKFILL & WATER IN SPECIFIED SOIL MIXTURE.
5. CONSTRUCT TRENCH EDGE AND ADD SPECIFIED MULCH. STAKE & GUY PLANT SECURELY.

4. Tree Planting on Slope
Scale N.T.S.

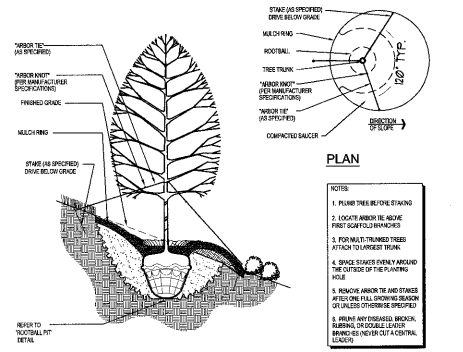

NOTES:
1. PLANT TREE BEFORE STAKING
2. LOCATE ARBOR TIE ABOVE FIRST SCAFFOLD BRANCHES
3. FOR MULTI-TRUNKED TREES ATTACH TO LARGEST TRUNK.
4. SPACE STAKES EVENLY AROUND THE OUTSIDE OF THE PLANTING HOLE
5. REMOVE ARBOR TIE AND STAKES AFTER ONE FULL GROWING SEASON OR UNLESS OTHERWISE SPECIFIED
6. PRUNE ANY DISEASED, BROKEN, RUBBING, OR DOUBLE LEADER BRANCHES (NEVER CUT A CENTRAL LEADER)

"ARBOR TIE" PRODUCTS DISTRIBUTED BY
DEEP ROOT PARTNERS, L.P.
P.O. BOX 927
DECATUR, GEORGIA 30031-0927
CONTACT: BRENDA GUGLIELMINA
404.378.9390

5. Tree Guying on Slope
Scale N.T.S.

IMPORTANT NOTE:
1. ROTO-TILL ENTIRE PLANTING BED
2. NO POCKET PLANTING

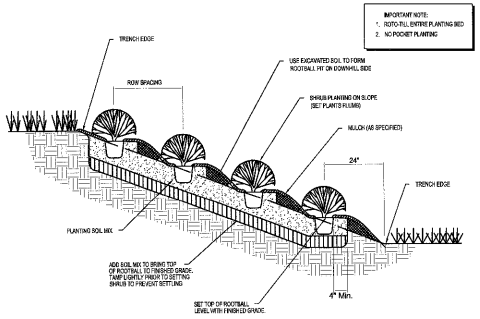

7. Shrub Planting on Slope
Scale N.T.S.

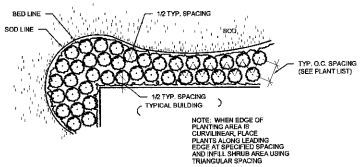

8. Triangular Spacing/Bed Line
Scale N.T.S.

IMPORTANT NOTE:
1. ROTO-TILL ENTIRE PLANTING BED
2. NO POCKET PLANTING

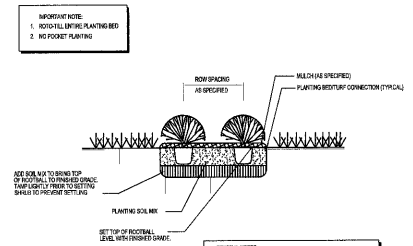

GENERAL NOTES:
1. SEE SPECIFICATION REQUIREMENTS PRIOR TO PLANTING.
2. ENSURE ALL AIR POCKETS ARE REMOVED WHILE BACKFILLING SOIL MIXTURE.
4. SOAK PLANT PIT IMMEDIATELY AFTER PLANTING.
5. DO NOT BREAK ROOT BALL. DO NOT CARRY OR ADJUST ROOT BALL BY USING TREE TRUNK.
6. UNLESS SPECIFIED, STAGGER ROWS OF SHRUBS
7. IF BAG, REMOVE BURLAP FROM TOP 1/3 OF BALL.

6. Shrub Planting
Scale N.T.S.

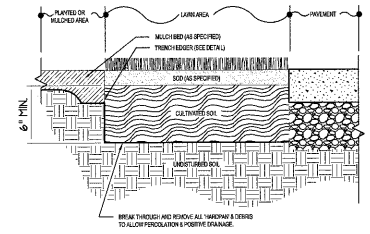

SOD INSTALLATION PROCEDURE:
1. GENERAL CONTRACTOR SHALL FINISH GRADE A FINISHED GRADE TO ± 0.25 OF A FOOT OF PROPOSED GRADES.
2. THOROUGHLY CULTIVATE ENTIRE AREA TO BE SODDED TO A MINIMUM DEPTH OF 6 INCHES.
3. PROVIDE SOIL AMENDMENTS (AS SPECIFIED PER SOIL TEST ANALYSIS). ROTOTILL AND HANDRAKE UNTIL SMOOTH, EVEN AND FREE OF DEBRIS.
4. WATER AREA TO BE SODDED PRIOR TO LAYING SOD.
5. CONSTRUCT TRENCH EDGE (AS SHOWN DETAIL THIS PAGE), LAY AND ROLL SOD. WATER THOROUGHLY.

9. Sod Installation
Scale N.T.S.

CARY PROJECT NUMBER 05-SP-118
APPROVED
TOWN OF CARY

APPROVED BY DRC DATE 10-31-05
PLANNING RBH DATE 11-23-05
ENGINEERING TB DATE 11-28-05

Niles Bolton Associates, Inc.
One Buckhead Plaza
3060 Peachtree Road, NW.
Suite 600
Atlanta, Georgia
404-365-7600
Fax 404-365-7610
nba@nilesbolton.com

JOB NUMBER: 304013.00
DRAWN BY: FML
CHECKED BY: GH

REVISIONS
DATE DESCRIPTION

This drawing, as an instrument of services, is and shall remain the property of the Landscape Architects and shall not be reproduced, published or used in any way without the permission of the Landscape Architect.

Carolina Preserve by DelWebb
AT AMBERLY
Cary, North Carolina

PLANTING DETAILS

L-1.08

DATE: 11.02.2005

RELEASED FOR CONSTRUCTION