


ELECTRICAL NOTES

- ⊕ NO VOLT DUPLEX OUTLET
- ⊕-17 NO VOLT DUPLEX OUTLET - 1/2 HPT
- ⊕-GF NO VOLT DUPLEX OUTLET WITH GROUND FAULT INTERRUPTER
- ⊕-BP NO VOLT DUPLEX OUTLET - WATER PROOF
- ⊕-JB NO VOLT JUNCTION BOX
- ⊕-PC NO VOLT DUPLEX CEILING OUTLET
- ⊕-PT NO VOLT PIG TAIL (FOR DIRECT APPLIANCE WIRING)
- ⊕-220V NO VOLT SINGLE FLOOR OUTLET
- ⊕-P1 220 VOLT OUTLET
- ⊕-220V 220 VOLT PIG TAIL (FOR DIRECT APPLIANCE WIRING)
- S 1-POLE SWITCH
- S₃ 3-WAY SWITCH
- S₄ 4-WAY SWITCH
- S_P RHEOSTAT SWITCH
- S_T TYPED SWITCH


- S-GFI SWITCH WITH GROUND FAULT INTERRUPTER
- S-SP WATER PROOF SWITCH
- S-PUSHBUTTON SWITCH (FOR GAMES OR DOOR OPENER - TYPICAL)
- S-TELEVISION CABLE OR ANTENNA
- S-TELEPHONE JACK
- S-NO VOLT SMOKE DETECTOR
- S-EXHAUST FAN PROVIDE MINIMUM 5 CFM
- S-INCANDESCENT CEILING MOUNT FIXTURE
- S-INCANDESCENT RECESSED FIXTURE
- S-WALL MOUNT FIXTURE
- S-KEYLESS FIXTURE
- S-SPOT LIGHT
- S-VAPOR PROOF CEILING FIXTURE FIXTURE TO BE LABELED 'SUITABLE FOR DAMP LOCATIONS' 'THERMALLY STABLE CONTROLS'
- S-PT ELECTRICAL PANEL
- S-GO GARBAGE DISPOSAL

- B CHIPS
- ☼ SINGLE FLOOD LIGHT
- ☼ DOUBLE FLOOD LIGHT
- TRACK LIGHTING
- FLUORESCENT STRIP LIGHT
- ☼ FLUORESCENT FIXTURE
- ☼ CEILING FAN
- ☼ CEILING FAN WITH LIGHT FIXTURE
- EP ELECTRICAL PANEL
- EM ELECTRICAL METER
- DISCONNECT SWITCH

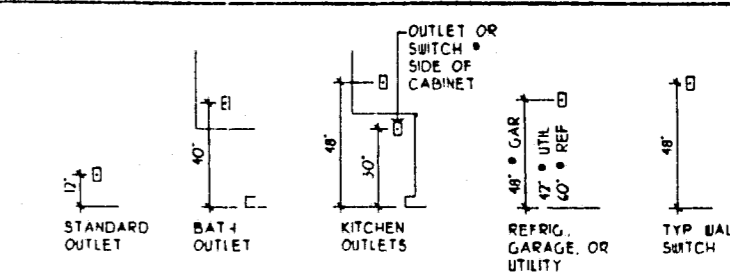

ELECTRIC FIXTURE HEIGHTS

UNLESS NOTED OTHERWISE:
GENERAL ELECTRICAL NOTES
ALL ELECTRICAL DEVICES AND WORK SHALL COMPLY WITH THE HIGHEST STANDARD OF THE NATIONAL ELECTRICAL CODE PERFORMANCE STANDARDS SHALL CONFORM TO ALL APPLICABLE CODES AND REGULATIONS AS ESTABLISHED BY GOVERNING AND APPROVAL AGENCIES
ALL DEVICES SHALL BE UL APPROVED AND BEAR UL LABELS UNLESS NOTED OTHERWISE, ALL SWITCHES AND OUTLET HEIGHTS SHALL BE AS NOTED ON THESE DRAWINGS
SWITCH AND DUPLEX OUTLETS OF MULTIPLE SWITCHES UP TO 10 FOUR WHEN SHOWN ADJACENT TO EACH OTHER ON PLAN SHALL BE GROUPED UNDER III ONE PLATE
VERIFY SERVICES AND LOCATION REQUIREMENTS FOR ALL APPLIANCES AND MECHANICAL EQUIPMENT PRIOR TO INSTALLATION
PROVIDE A MINIMUM OF TWO SEPARATE 20 AMP CIRCUITS TO KITCHEN APPLIANCES
PROVIDE A MINIMUM OF ONE SEPARATE 20 AMP CIRCUIT TO LAUNDRY APPLIANCES

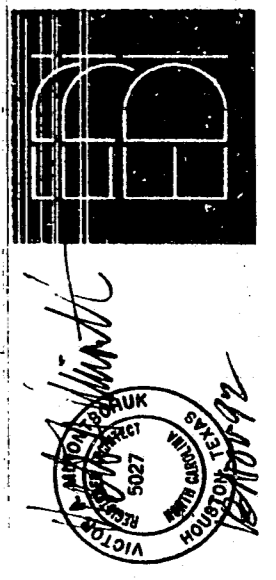

DR # IN BY:
JAY CALDWELL
LYNDA B ELLIS
C-CHECKED
REVISIONS
CHECKED
DATE
DATE
PRG. REC. NO. 92066
ISSUED
PLOT DATE: 2/18/92
FILE 2249FA
COMPILED BY JAY CALDWELL
REV. BY LYNDA B. ELLIS
ALL RIGHTS RESERVED
DRAWING NUMBER