




DETAIL: STAKING AND RAISED PLANTING
NOT TO SCALE

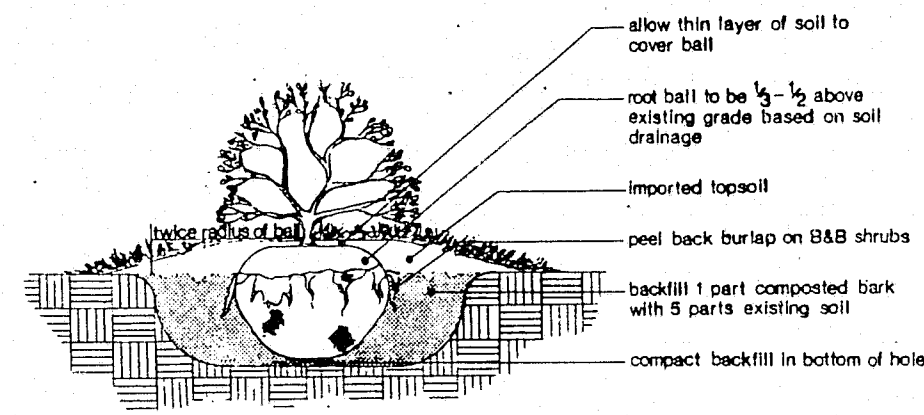

DETAIL: SHRUB DETAIL (CONTAINER AND B&B)
NOT TO SCALE

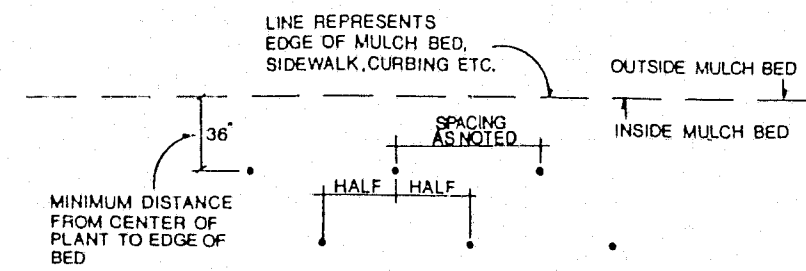

DETAIL: SHRUB SPACING
NOT TO SCALE

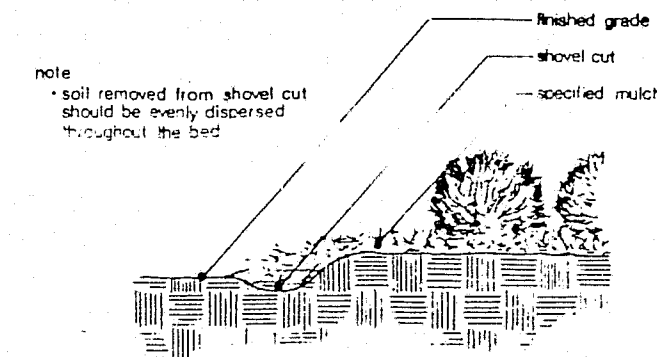

DETAIL: EDGING
NOT TO SCALE

PLANTING SPECIFICATIONS

- I. Scope of Work:
The landscape contractor is to supply the labor, equipment and materials necessary to prepare the site for actual landscaping. The scope of this contract includes landscape and irrigation installation. All backfilling and rough grading within one tenth of final grades will be completed by General Contractor prior to landscape installation. The landscape contractor will be responsible for fine grading. The landscape contractor must be reputable and shall submit his registered landscape contractor's license number along with his bid.
- II. Site preparation:
The site area shall be cleared of any debris or existing obstructions interfering with execution of the work according to approved drawings. A minimum fall shall slope away from permanent buildings to prohibit water accumulation around building foundations. All other areas on the site are to be graded so that water will not accumulate at any point.
- III. Planting:
 - A. Categories of Plant Material:
 1. Container Grown:
This category is defined as nursery stock grown in a container. Care shall be taken not to damage plant material during removal from container.
 2. Ball and Burlap (B&B):
This category is defined as nursery stock grown and dug from the field. B&B material shall be dug with an adequate size ball to encompass fibrous roots necessary to sustain life until new roots can be established.
 - B. Planting Procedure:
See details above.
 - C. Watering:
The contractor shall be responsible for proper watering of all plant material until completion of work.
 - D. Fertilizing:
All plant material shall be fertilized at the completion of installation in a broadcast fashion with 10-10-10.
- IV. Natural Areas and Mulching:
All areas to be mulched shall be covered with a minimum two (2) inches of specified mulch, except low ground-covers which shall receive one (1) inch of specified mulch material.

- V. Turf Areas:
 - A. Seeding Procedure:
The areas to be seeded shall be fine graded and free of clods and foreign material prior to the distribution of fertilizers, lime or seed. Seed is not to be distributed until fertilizer and lime have been applied over the seed bed. A light raking over the entire seeded area shall follow seeding operation. All seeded areas are to be mulched with wheatstraw at the rate of forty (40) pounds per 1000 square feet.
 - B. Fertilizer:
* See table to the right for rates.
 - C. Lime:
A soil test is highly recommended to determine soil analysis. Use of lime should be determined by soil test to achieve proper ph balance. In absence of a soil test, apply 75 lbs. per 1000 sq. ft. for a general amount.
 - D. Seed:
Seed is to be evenly distributed to maintain a consistent look after germination.
* See table to the right for rates.
- VI. Changes in Work:
The substitution of specified plant or construction material will be approved by the Landscape Architect. All necessary changes shall be comparable to the original specifications.
- VII. Clean Up:
The field Supervisor shall be responsible for cleaning up the job site before work is completed. All walks and similar paved areas shall be swept free of dirt and debris caused by construction work. All mulched areas shall be evenly defined and mulch shall be consistently settled. All trash or excess construction material shall be removed and hauled away from site to give a professional appearance to the completed site.
- VIII. Guarantee Period:
All plant material shall be guaranteed for one (1) year from time of final inspection. Grass is warranted until a uniform stand is established. Bare areas are not to exceed 3% of lawn area.
- IX. Replacements:
Plants that die during the guaranty period shall be removed immediately and replaced at the end of the guaranty period. Only one replacement is required.

| Season | Type Grass | SEEDING | | FERTILIZATION | |
|--------|------------|------------------------------------|----------------------|-----------------|----------------------|
| | | Planting Dates | Rates lbs./1000 S.F. | Type (Analysis) | Rates lbs./1000 S.F. |
| Cool | Fescue | Sept. 1-Mar. 31 (year rd. if Irrg) | 6-7 | 16-4-8 | 10-50 |
| Warm | Bermuda | April - July 31 | 1-2 | 10-10-10 | 20-25 |
| Warm | Centipede | Mar. 1 - July 31 | 1-1 | 10-10-10 | 40-50 |


* Information referenced from N.C. Agricultural Extension Service

Skinner Lamm, Hood & Higginbotham PA, Architects

304 N. Goldsboro Street P.O. Box 655 WELDON, NC 27784 919/291-4127

CARY FIRE STATION NO. 1
HARRISON AVENUE
CARY, NORTH CAROLINA

SEAL



CRESCENT ACRES
ROUTE 1, BOX 624-A
BATESBORO, NC 27809 (919) 972-4400

| | | |
|--------------|---------|-------------|
| CONTRACT NO. | DATE | DRAWN |
| 1572 | 1/16/01 | [Signature] |
| L2 | | |
| 7 of 7 | | |