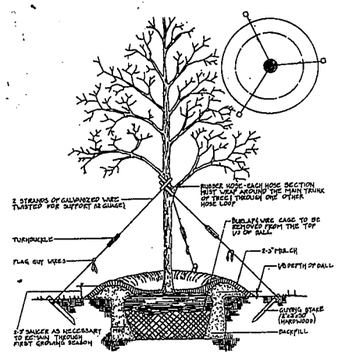

TYPICAL TREE DETAIL



TYPICAL SHRUB/CONTAINER DETAIL

PLANT LIST

QUANTITY	COMMON NAME	BOTANICAL NAME	SIZE
12	Red Maple	Acer rubrum	2.5 - 3" cal.
25	Leyland Cypress	x Cupressocyparis leylandii	1/2 BU. 3.5' o.c.
5	'Natchez' Crapemyrtle	Lagerstroemia indica 'Natchez'	6 -7' ht.
62	Loblolly Pine	Pinus taeda	3 gal. 6' o.c.
62	Elaeagnus	Elaegnus pungens	3 gal. 4' o.c.
98	Dwarf Burford Holly	Ilex cornuta 'Burfordii nana'	3 gal. 2.5' o.c.
3	Nellie Stevens Holly	Ilex x 'Nellie R. Stevens'	5 -8' ht.
17	Dwarf Yaupon Holly	Ilex vomitoria 'Nana'	1/2 BU. 3.5' o.c.
58	Frasier Photinia	Photinia x fraseri	5 GAL. 3.5' o.c.



VICINITY MAP
NOT TO SCALE

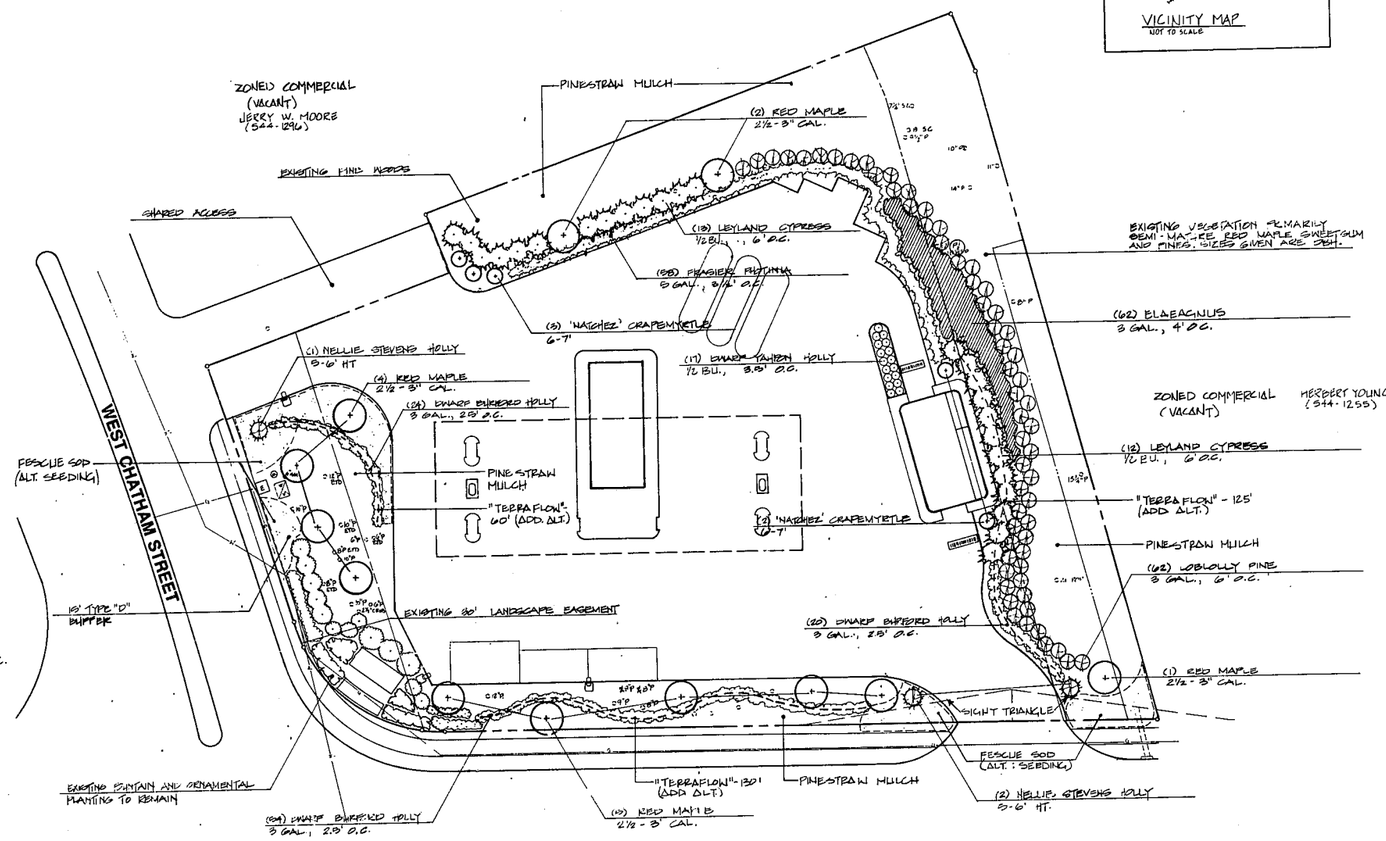

SITE DEVELOPMENT SUMMARY

SITE ACREAGE:	1.08
ZONING:	COMMERCIAL
ACTUAL RETAIL SPACE:	370 SQ. FT.
PARKING REQUIRED:	2 SPACES
PARKING PROVIDED:	6 SPACES
SHADE TREES @ 1/20	1
IMPERVIOUS AREA:	23,132 SQ. FT. (49%)

LANDSCAPE CALCULATIONS

SITE AREA:	47,044 SQ. FT.
25% OF 40,000	10,000 SQ. FT.
20% OF 7,045	1,409 SQ. FT.
TOTAL REQ'D LANDSCAPED AREA	1',409 SQ. FT.
ACTUAL LANDSCAPED AREA	23,913 SQ. FT.

EXISTING TREE KEY
X = TREE TO BE REMOVED
P = LOBLOLLY PINE
POP = TULIP POPLAR
SG = SWEETGUM
EHD = EARLY TRUNK DAMAGE

LITTLE & LITTLE
LANDSCAPE ARCHITECTURE PLANNING
PO BOX 1148 RALEIGH NORTH CAROLINA 27602 919 821 1021

FACILITY AT
OLD APEX & WEST CHATHAM
CARY, NORTH CAROLINA
B.P. OIL COMPANY

Planting Plan

North

Scale: 1" = 20'
0 10 20 40 80

Date
1 FEBRUARY 1990
15 MARCH 1990
6 APRIL 1990 (2ND REVISION)
22 MAY 1990
6 AUGUST 1990

Sheet: LA-3

Job Number: 3500.05