GENERAL NOTES:

1. This plan is for planting purposes only. For information relating to grading, refer to grading plan.
2. Verification of total quantities as shown in the plant list shall be the responsibility of the Landscape Contractor.
3. All plants and planting procedures shall conform to accepted standards established by the American Association of Nurserymen latest edition.
4. All saucers shall be soaked with water and mulched immediately following planting.
5. All trees and shrubs shall be full well branched plants which are characteristic of the species.
6. All grass is to be Arid, Fescue, or better quality.
7. All root balls removed from containers shall be scarified prior to backfilling.
8. Remove all string and wire from the base of all plant material.
9. Mulch all beds with 3" Hardwood Bark mulch, unless otherwise noted. Bed line shall be trenched.
10. Topsoil shall be spread over the entire landscape area to a minimum depth of 6" in lawn areas and 8" in shurb beds.
11. Test soil to determine nutrient needs.
12. Soil in Azalea and DayLilly beds is to be amended with partially rotten pine bark. Spread a minimum of 2" over bed area and till to a depth of 6-8".

NORTH

20' 0' 5' 10' 20' 40'

SCALE IN FEET

WAVERLY PLACE SHOPPING CENTER

ZONED B-2 CU

NOTE: all proposed plant material located within the sight distance triangles shall be installed in accordance with current Town standards. Please note that current Town standards have height restrictions measured from the driver's eye 3.5 feet high to an object height of 4.25 feet high as measured from the pavement surface.

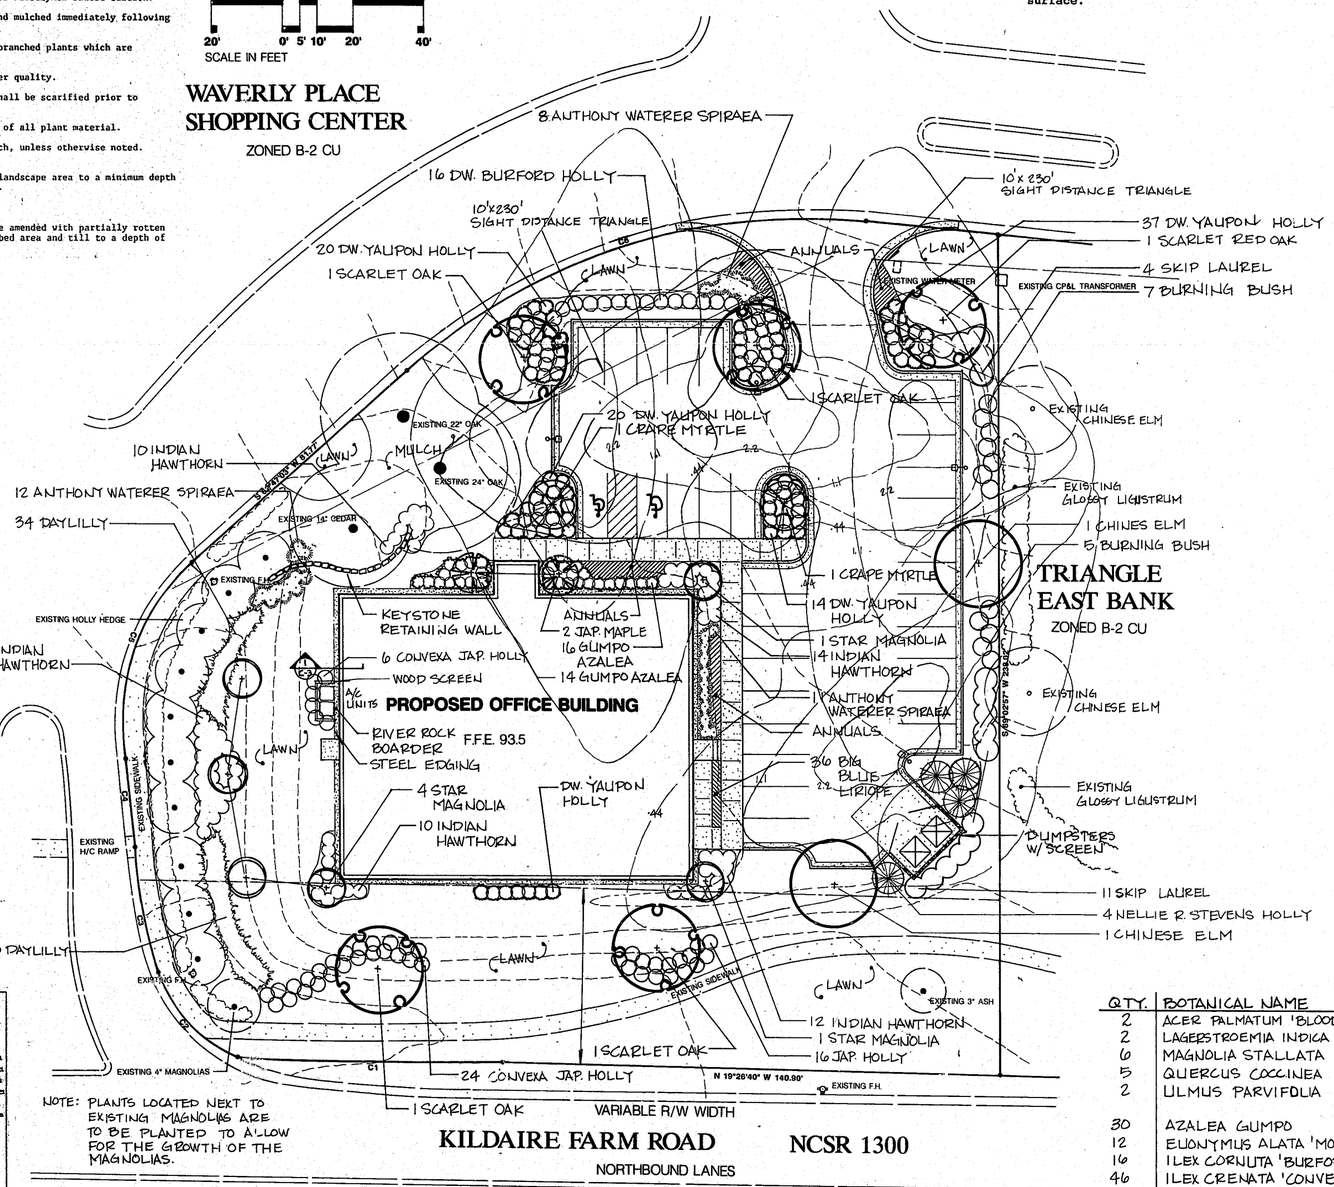

NOTE: PLANTS LOCATED NEXT TO EXISTING MAGNOLIAS ARE TO BE PLANTED TO ALLOW FOR THE GROWTH OF THE MAGNOLIAS.

KILDAIRE FARM ROAD NCSR 1300

NORTHBOUND LANES

TRIANGLE EAST BANK

ZONED B-2 CU



SHRUB BED PLANTING

NO SCALE

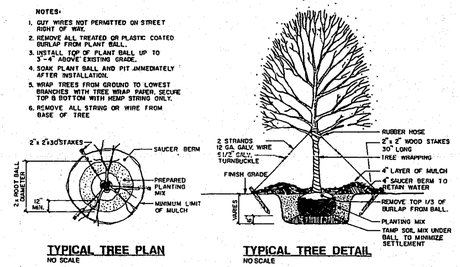

TYPICAL TREE PLAN

NO SCALE

TYPICAL TREE DETAIL

NO SCALE

PLANTING DETAIL - LARGE MATURING TREE

NO SCALE

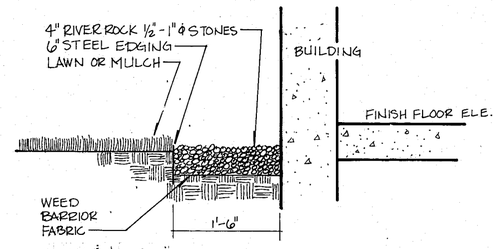

1 / C-3 RIVER ROCK BOARDER SECTION

N.T.S.

QTY.	BOTANICAL NAME	COMMON NAME	ROOT	SIZE	HT.
2	ACER PALMATUM 'BLOODGOOD'	JAPANESE MAPLE	B&B		5'-6'
2	LAGERSTROEMIA INDICA 'CAROLINA BEAUTY'	CRAPE MYRTLE	B&B		7'-8'
6	MAGNOLIA STALLATA	STAR MAGNOLIA	B&B		4'
5	QUERCUS COCCINEA	SCARLET OAK	B&B	3" CAL.	
2	ULMUS PARVIFOLIA	CHINESE ELM	B&B	3" CAL.	
30	AZALEA GUMPO	GUMPO AZALEA	3 GAL.		
12	EUONYMUS ALATA 'MONTROSA'	BURNING BUSH	3 GAL.		24"
16	ILEX CORNUTA 'BURFORDII NANA'	DW. BURFORD HOLLY	5 GAL.		30"
46	ILEX CRENATA 'CONVEXA'	CONVEXA JAP. HOLLY	3 GAL.		18"-24"
4	ILEX NELLIE R. STEVENS	NELLIE R. STEVENS HOLLY	B&B		5'
98	ILEX VOMITORIA 'NANA'	DW. YAUPON HOLLY	3 GAL.		
15	PRUNUS LAUROCERASUS 'SKIPKAENSIS'	SKIP LAUREL	3 GAL.		24"
71	RAPHIOLEPIS INDICA 'ENCHANTRESS'	INDIAN HAWTHORN	3 GAL.		15"-18"
31	SPIRAEA x BUMALDA 'ANTHONY WATERER'	ANTHONY WATERER SPIRAEA	1 GAL.		
74	HEREROCALLIS FULVA	DAY LILLY	1 GAL.		
36	LIRIOPE MUSCARI 'BIGBLUE'	BIG BLUE LIRIOPE	4" POT		

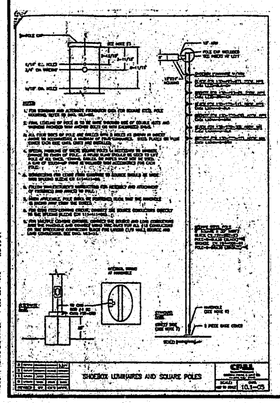

SITE LIGHTING

22,000 Enclosed Luminaire - C.B.
Pattern: Type III
Mounting Height: 30 ft.
Socket Position: 2
Lamp: Sylvania 200 watt - Clear - 22,000 lumens - HPS
Iso - Footcandle curve based on initial lumens
The values are expressed in footcandles.

COPYRIGHT © BOBBITT & ASSOCIATES, INC. ALL RIGHTS RESERVED.

BOBBITT & ASSOCIATES, INC.
3404 LAKE WOODARD DRIVE
RALEIGH, NC 27604
[919] 231-8738
FAX [919] 231-8164

BOBBITT DESIGN · BUILD

NORTH CAROLINA REGISTERED LANDSCAPE ARCHITECT SEAL 696 DONALD E. MANTA

Donald E. Manta
3404 Lake Woodard Dr.
Raleigh, NC 27604

Cary Travel

CARY, NORTH CAROLINA

LANDSCAPE PLAN

APPROVED FOR CONSTRUCTION

1456-0028

SCALE: 1"=20'

26 MAY 1994

C-3

ACCENT REPROGRAPHICS 1-800-553-1993 89-0947