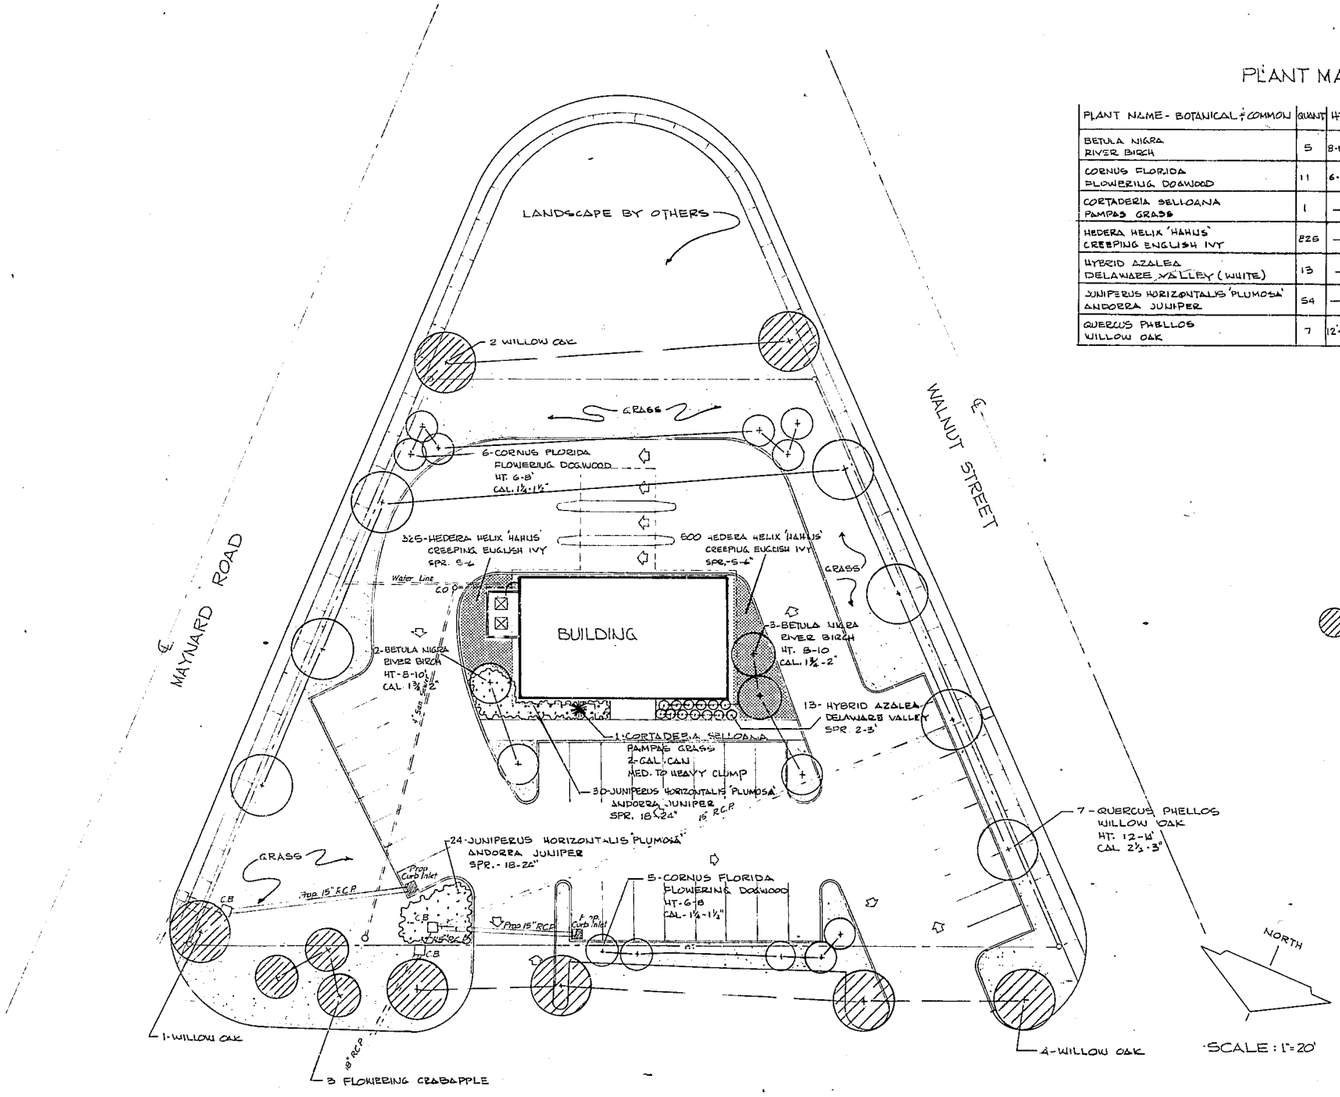

PLANT MATERIALS LIST

PLANT NAME - BOTANICAL / COMMON	QUANT	HT.	SPR.	CAL.	ROOT	REMARKS	INSTALLED PRICE EA	TOTAL PRICE
BETULA NIGRA RIVER BIRCH	5	8-10'	–	1⅜-2"	B&B	3 STEM MIN.		
CORNUS FLORIDA FLOWERING DOGWOOD	11	6-8'	—	1¼-1½	B&B			
CORTADERIA SELLOANA PAMPAS GRASS	1	—	—	—	2 GAL CAN.	MED. TO HEAVY CLUMP		
HEDERA HELIX 'HAHUS' CREEPING ENGLISH IVY	826	—	5-6"	—	2½-3" POTS	PLANT 1' O.C.		
HYBRID AZALEA DELAWARE VALLEY (WHITE)	13	–	24-30"	—	B&B OR 2 GAL			
JUNIPERUS HORIZONTALIS 'PLUMOSA' ANDORRA JUNIPER	54	—	18-24"	—	B&B			
QUERCUS PHELLOS WILLOW OAK	7	12'-14'	–	2½-3"	B&B			

PLANT TOTAL _____
GRASS SEEDING _____
PINE BARK MULCH _____
TOTAL LANDSCAPE ESTIMATE _____

DESIGN DAH
DRAWN DAH
CHECKED B.G.
DATE 12-19-74

REVISIONS
1) PLANTING - 12-19-74

PLANTING PLAN

LEWIS CLARKE ASSOCIATES - 8 KOGER EXECUTIVE CENTER
SUITE 205 RALEIGH, N.C. 27612 TELEPHONE (919) 782-4670

LCA LEWIS CLARKE ASSOCIATES LANDSCAPE ARCHITECTURE PLANNING

NORTH CAROLINA NATIONAL BANK
CARY'S VILLAGE SQUARE
CARY, NORTH CAROLINA

SHEET 1 OF TOTAL 1
PROJECT 1092